


KM 7575 FL

Induction hob with onset controls
with 6 PowerFlex cooking areas for maximum power output

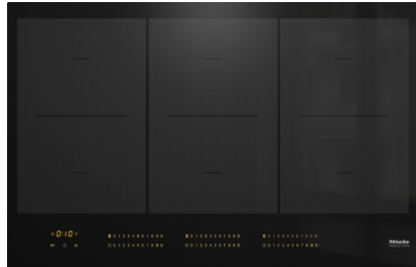


- Intuitive quick selection via number sequences – Smart Select
- 6 cooking zones incl. 6 high-power PowerFlex cooking areas
- A width of 800mm for surface-mounted or flush-fit installation
- Shortest heating-up times - TwinBooster
- Communication with the hood - automatic function Con@ctivity

EAN: 4002516138631 / article number: 26757570D / material number: 11022980

Heating type	
Heating type	Induction
Construction type	
Independent of cooker	•
Design	
Elegant glass ceramic surface	•
Ceramic surface colour	Black
Flush-fit installation	•
Surface-mounted installation	•
Can be combined with SmartLine	•
Cooking zone details	
Number of cooking zones	6
Number of cooking areas	3
Maximum number of pans	6
PowerFlex cooking zone	
No.	6
Size in mm	Ø 150 – 230
Max. rating in W	2100
Max. Booster power rating in W	3000
Max. TwinBooster power rating in W	3650
Cooking zone	
Position	Left
Type	PowerFlex bridge
Size in mm	230x390
Max. rating in W	3150
Max. Booster power rating in W	3400
Max. TwinBooster power rating in W	3650
Position	Centred
Type	PowerFlex bridge
Size in mm	230x390
Max. rating in W	3400
Max. Booster power rating in W	4800
Max. TwinBooster power rating in W	7300
Position	right
Type	PowerFlex bridge
Size in mm	230x390
Max. rating in W	3400
Max. Booster power rating in W	4800
Max. TwinBooster power rating in W	7300

KM 7575 FL



Induction hob with onset controls
with 6 PowerFlex cooking areas for maximum power output

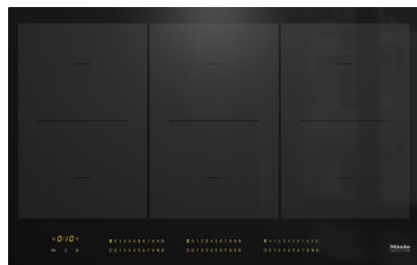

User convenience	
Automatic function Con@ctivity 3.0	•
Operation via sensor controls	Smart Select
Display colour	Yellow
Permanent pan recognition	•
Pan and pan size recognition	•
Stop & Go function	•
Recall function	•
Minute minder	•
Safety switch-off	•
Auto heat-up	•
Keeping warm	•
Individual setting options (e.g. buzzers)	•
Wipe protection	•
Cleaning convenience	
Easy to clean ceramic glass	•
Safety	
Safety switch-off	•
Lock function	•
System lock	•
Integrated cooling fan	•
Overheating protection	•
Residual heat indicator	•
Technical data	
Dimensions in mm (width)	800
Dimensions in mm (height)	51
Casing height incl. connection box in mm	51
Dimensions in mm (depth)	520
Cutout dimensions in mm (width) with surface-mounted installation	780
Cutout dimensions in mm (depth) with surface-mounted installation	500
Internal cutout dimensions in mm (width) with flush installation	780
Internal cutout dimensions in mm (depth) with flush installation	500
External cutout dimensions in mm (width) with flush installation	804
External cutout dimensions in mm (depth) with flush installation	524
Weight in kg	16
Total rated load in kW	11,000
Voltage in V	230
Frequency in Hz	50-60
Connection cable length in m	1,4
Standard accessories	
Mains cable	•


KM 7575 FL

Induction hob with onset controls
with 6 PowerFlex cooking areas for maximum power output

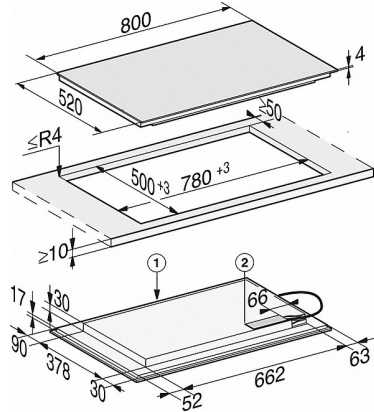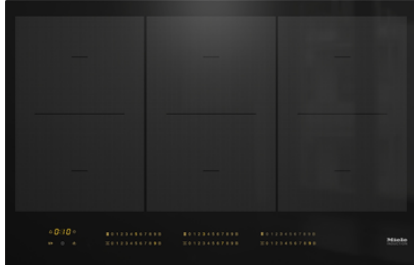

KM 7575 FL onset (installation drawing)

1) Front, 2) Mains connection box with mains connection cable, L = 1440 mm

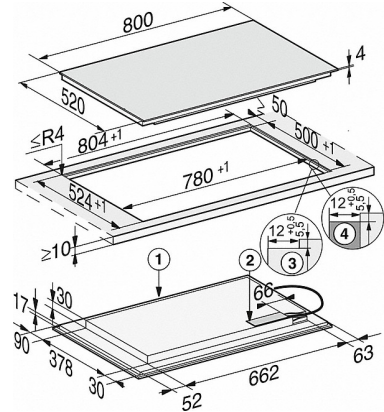

KM 7575 FL flush (installation drawing)

1) Front, 2) Mains connection box with mains connection cable, L = 1440 mm, 3) Stepped cut-out natural stone worktop, 4) Wood support 12 mm (not supplied)